


EJ TYPE

SLUG EJECTOR COMPONENTS



REPLACEMENT SLUG EJECTOR COMPONENTS FOR SHOULDER HEAD AND BALL-LOCK TYPE EJECTOR PUNCHES.

HOW TO ORDER: EXAMPLES	
Qty.	Cat. No.
20	EJ-3
50	CS-6

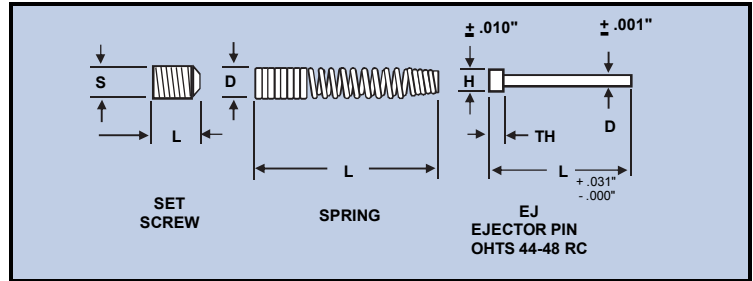

PINS ONLY (MINIMUM ORDER QTY. 10 PCS.)

CATALOG NUMBER	D	H	T	L	NET PRICE EACH PER QUANTITY (US \$)			
	PIN DIA.	HEAD DIA.	HEAD THICK	LENGTH	100	50-99	25-49	10-24
EJ-2	.015"	.048"	.031"	1.11"	2.32	2.65	3.03	3.48
EJ-2A	.020"	.048"	.031"	1.11"	1.20	1.58	2.03	2.54
EJ-3	.027"	.078"	.047"	1.38"	1.14	1.52	1.96	2.47
EJ-4	.041"	.094"	.062"	1.94"	1.14	1.52	1.96	2.47
EJ-6	.058"	.125"	.062"	1.94"	1.14	1.52	1.96	2.47
EJ-9	.089"	.156"	.094"	2.22"	1.20	1.59	2.03	2.54
EJ-12	.120"	.188"	.094"	2.22"	1.64	2.14	2.78	3.47

COMPONENT SETS (MINIMUM ORDER QTY. 10 PCS.)

(INCLUDES PINS, SPRINGS, & SET SCREWS)

CATALOG NUMBER	SPRING		SET SCREW		NET PRICE EACH PER QUANTITY (US \$)			
	D	L	S	L	100	50-99	25-49	10-24
	DIA.	LENGTH	THREAD	LENGTH				
CS-2	.062"	2"	2-56	.125"	3.37	3.70	4.08	4.53
CS-2A	.062"	2"	2-56	.125"	2.25	2.63	3.08	3.59
CS-3	.093"	2-1/2"	5-40	.125"	2.19	2.57	3.01	3.52
CS-4	.093"	2-1/2"	6-32	.125"	2.19	2.57	3.01	3.52
CS-6	.125"	3"	8-32	.125"	2.19	2.57	3.01	3.52
CS-9	.187"	3"	1/4-20	.250"	2.25	2.64	3.08	3.59
CS-12	.187"	3"	1/4-20	.250"	2.69	3.19	3.83	4.52

* Also available with 1/4-28 set screw at same price. Please specify when ordering

QUANTITY DISCOUNTS
Apply to EJ & CS , Based on one size, one shipment, and one destination
Over 300 Pieces Call For Pricing

GF-1000 RIGHT-ON™ PIN GRINDING FIXTURE




Why spend thousands of dollars on a pin cut-off machine?

This specialized precision-machined fixture is designed for fast and easy cut-off and grinding of ejector pins, cores, and sleeves, right on your surface grinder. It gives accurate and repeatable results when cutting pins and sleeves from 1/16" to 3/4" diameter, in lengths up to 14".

Jaw clamp has a 1-1/4" linear grip which holds pins firmly in position, thus preventing the nicks and dents that sometimes occur when using a single point V-Block.

Fixture can be used in the horizontal position or vertically, when clamped to an adequate right angle plate.

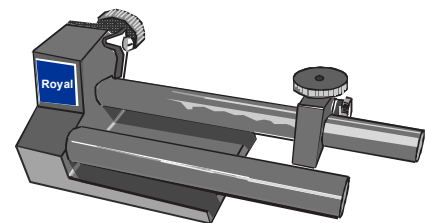

CATALOG NO.	NET PRICE EACH (US \$)
GF-1000	\$445