

H-13 "HARDENED-THROUGH" HOTWORK EJECTOR PINS

TIGHTEST TOLERANCES IN THE INDUSTRY (.0003")

MATERIAL : H-13 HOTWORK DIE STEEL

STRAIGHT STYLE


CORE: THROUGH-HARDENED TO 50-55 RC

SURFACE: ION NITRIDED TO 65-74 RC

FRACTIONAL AND .005" OVERSIZED DIAMETERS

TOLERANCES			
D	H	T	L
-.0005"	+000"	+.000"	+375"
-.0008"	-.010"	-.002"	-.000"

HOW TO ORDER: EXAMPLES			
Qty.	Cat No.	(IF .005" O.S.)	Length
24	RHX-13	+.005	L-10
48	RHX-9		L-10

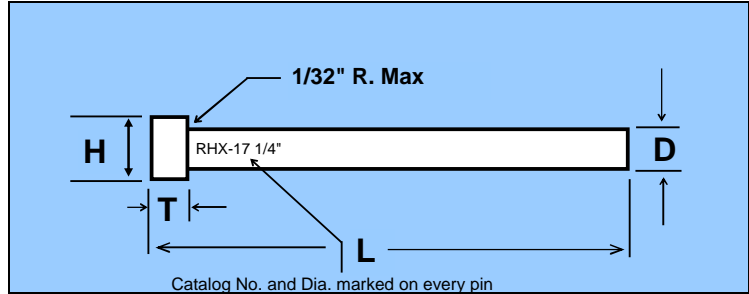

CATALOG NUMBER	D		H	T	NET PRICE EACH PER QUANTITY (US \$)					PKG. QTY.		
	PIN DIA.				HEAD DIA.	HEAD THICK.	L-6"	L-10"			L-14"	
	NOMINAL DIA.	DECIMAL EQUIV.					STANDARD DIA.	STANDARD DIA.	+.005" OVERSIZED DIA.		STANDARD DIA.	+.005" OVERSIZED DIA.
RHX-3	3/64	0.0469	1/4	1/8	4.30	Q	Q	Q	Q	12		
RHX-5	1/16	0.0625			4.05	4.75	5.30	Q	Q			
RHX-6	5/64	0.0781			4.05	4.75	5.30	Q	Q			
RHX-7	3/32	0.0938			3.65	4.10	4.85	Q	Q			
RHX-8	7/64	0.1094			3.65	4.10	4.85	Q	Q			
RHX-9	1/8	0.1250			1.95	2.15	2.25	2.50	2.80			
RHX-10	9/64	0.1406			2.15	2.35	3.15	3.05	Q			
RHX-11	5/32	0.1563	9/32	5/32	2.05	2.30	2.40	2.80	3.05			
RHX-12	11/64	0.1719	11/32	3/16	2.30	2.50	3.35	3.05	Q			
RHX-13	3/16	0.1875	3/8	3/16	2.10	2.45	2.55	3.10	3.30			
RHX-14	13/64	0.2031	3/8	3/16	2.55	2.70	Q	3.25	Q			
RHX-15	7/32	0.2188	13/32	3/16	2.30	2.70	2.95	3.35	Q			
RHX-16	15/64	0.2344	13/32	3/16	2.85	3.00	Q	3.70	Q			
RHX-17	1/4	0.2500	7/16	3/16	2.45	3.00	3.10	3.70	4.00			
RHX-18	17/64	0.2656	7/16	1/4	3.25	3.35	Q	4.05	Q			
RHX-19	9/32	0.2813	7/16	1/4	2.75	3.45	3.55	4.20	Q			
RHX-20	19/64	0.2969	1/2	1/4	3.65	3.80	Q	4.70	Q			
RHX-21	5/16	0.3125	1/2	1/4	3.05	3.80	3.90	4.75	5.25			
RHX-22	21/64	0.3281	9/16	1/4	4.00	4.20	Q	5.30	Q			
RHX-23	11/32	0.3438	9/16	1/4	3.40	4.30	4.55	5.50	Q			
RHX-24	23/64	0.3594	5/8	1/4	4.40	4.75	Q	5.95	Q			
RHX-25	3/8	0.3750	5/8	1/4	3.65	4.85	5.05	6.00	6.35			
RHX-26	25/64	0.3906	37/64	1/4	5.35	5.90	Q	Q	Q			
RHX-27	13/32	0.4063	11/16	1/4	4.00	5.30	5.70	6.90	Q			
RHX-28	27/64	0.4219	11/16	1/4	5.25	6.75	Q	Q	Q			
RHX-29	7/16	0.4375	11/16	1/4	4.35	5.90	6.15	7.60	8.40			
RHX-30	29/64	0.4531	45/64	1/4	5.70	7.05	Q	Q	Q			
RHX-31	15/32	0.4688	3/4	1/4	5.10	6.45	6.85	9.30	Q			
RHX-32	31/64	0.4844	3/4	1/4	6.20	8.15	Q	Q	Q			
RHX-33	1/2	0.5000	3/4	1/4	5.15	6.95	7.45	9.15	9.75			

QUANTITY DISCOUNTS		
Apply to all standard RHX Shoulder and Straight Styles, and are combinable with PT, RX, RC, RCX, MPT, and ME Ejector and Core Pins		
300 Pieces (one size).....Less 5%	500 Pieces (cumulative).....Less 5%	1200 Pieces (cumulative).....Less 7%

← See previous page for custom modification information

Q = Price Per Quotation